




PRO-450T

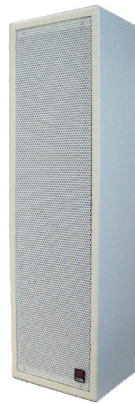

Two-way loudspeaker with dual woofer and quality Hi End Acoustic enclosure density fiberboard average. Provides 240 W music. 1 "tweeter with neodymium aluminum coil Woofer Two 6.5 "coated paper membrane White RAL 9003. Acoustically transparent metal grill.

Features:

- Playback quality far superior to professional or Hi Fi systems.
- very linear frequency response: 90 to 18,500 Hz (+ / -3 dB)
- very coherent phase response
- • Very low harmonic distortion
- Hi End Tweeter (1 ") horn attached to aluminum to improve the sensitivity and control dispersion
- Hi End Woofer (6.5 ") coated paper with rubber suspension
- acoustically transparent metal grille

TECHNICAL SPECIFICATIONS	
NOMINAL POWER	120 W RMS
FREQUENCY RESOPONSE	90-18.500 Hz (+/- 3dB)
SENSITIVITY	92 dB (1 W, 1m)
SPEAKER IMPEDANCE	8 Ω
DISPERSION	70 x 50
TRANSFORMER (70 V)	Optional 80 / 60 / 40 W
CONNECTOR	Presion
DIMENSIONS (height x width x depth)	210 x 700 x 180 mm
WEIGHT	7 kg